

PFP-20HPHND-HP

HIGH PRESSURE PUMP

This high pressure Honda pump goes up to 300 psi. Engine and pump are mounted on a protective frame made of steel with shock absorbent and folding handles.

Also available in skid version



ENGINE SPECIFICATIONS

- GX630 Honda air cooled engine
- V-Twin cylinder, 4-stroke gasoline engine
- 12V electric start
- 6 gallon (22 l) detachable fuel tank.
The fuel tank is made from plastic

PUMP UNIT SPECIFICATIONS


- Transmission drive C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Stainless steel pump shaft
- Belt drive transmission
- Exhaust priming system, guaranteed up to 20' (6 meter) lift
- One 1-1/2" (38 mm) delivery outlet with Fire Type swing-out valve
- One 2 1/2" (65 mm) suction inlet
- Dimensions: Length: 27-1/2" (700 mm)
Width: 22" (560 mm); Height: 24" (610 mm)
- Weight: 185 lbs (84 kg)

INCLUDED ACCESSORIES

- 17 Amps alternator
- Pressure gauge
- Low oil alert
- 12-V battery

PERFORMANCE

- 140 GPM @ 50 PSI
- 125 GPM @ 100 PSI
- 100 GPM @ 150 PSI
- 60 GPM @ 200 PSI
- 40 GPM @ 250 PSI
- 25 GPM @ 275 PSI

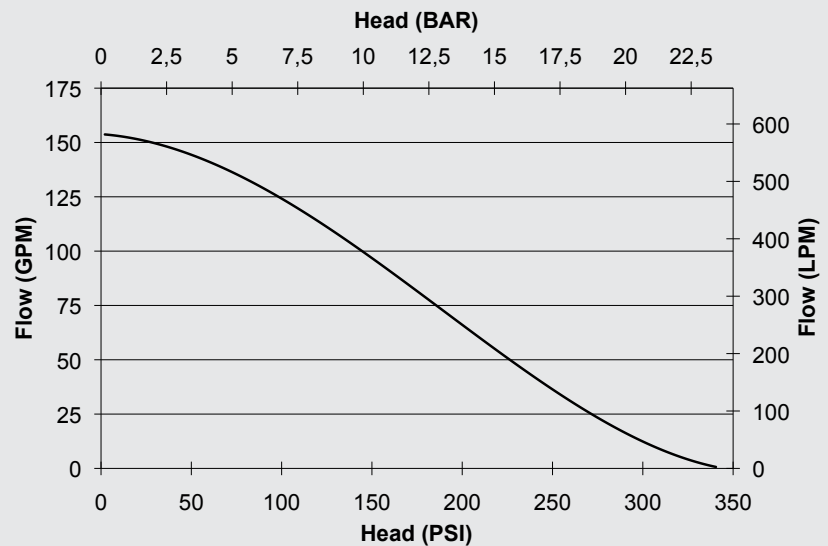


LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



A CENTURY
OF ENGINEERING
FOR THE BRAVEST

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com