

PFP-99HP-DSL

HIGH PRESSURE VOLUME PUMP

This high pressure/high volume pump is made to fight fire or supply water to the fire scene. Engine and pump are mounted on a portable skid chassis.

Also available in skid version



ENGINE SPECIFICATIONS

- Kubota Diesel developing 99hp at 2600 RPM, liquid cooled with internal system, 4-cylinder, diesel engine
- 12V electric start
- 6 gallons capacity fuel tank, sufficient for 2 hours continuous operation approximately, made of plastic, with filling neck and lid

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from resistant aluminum alloy
- Bronze impellers
- Mechanical shaft seal
- Stainless steel pump shaft
- Electric priming system, guaranteed up to 15' (4.5 meter) lift
- Two 2 1/2" (65 mm) delivery outlets
- One 4" (100 mm) suction inlet
- Dimensions: Length: 62" (1575 mm)
Width: 37" (940 mm); Height: 59" (1500 mm)
- Weight: 1500 lbs (680 kg)


CONTROL PANEL

- Engine start/stop button
- Operating panel light
- Throttle control lever
- Pressure gauge
- Oil control gauge
- Vacuumpressure gauge

PERFORMANCE

940 GPM @ 10 PSI
785 GPM @ 50 PSI
715 GPM @ 100 PSI

575 GPM @ 150 PSI
350 GPM @ 200 PSI

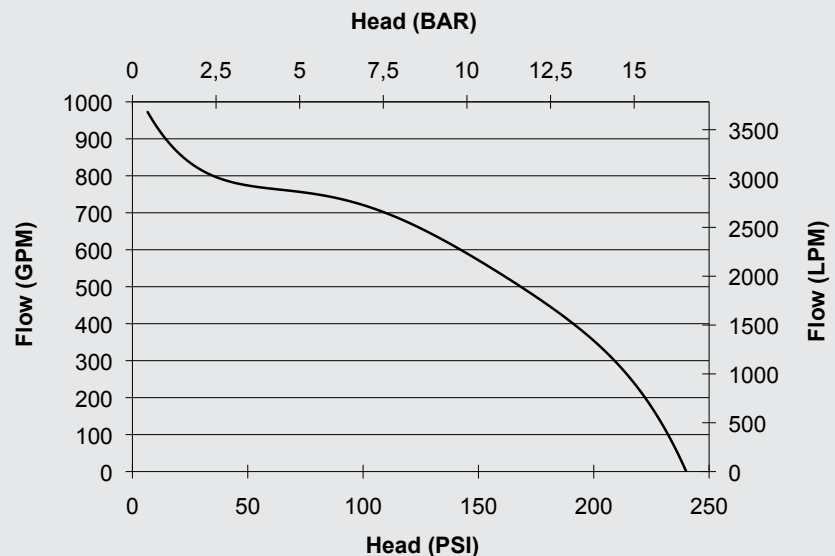


LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com