

PFP-25HP-DSL-MR

DIESEL POWERED PUMP

The MR version gives you more pressure to meet the requirements of an initial attack.

Also available in skid version



ENGINE SPECIFICATIONS

- D902 Kubota liquid cooled engine
- 3-cylinder, 4-stroke diesel engine
- Electric start
- 6 gallon (22 l) detachable fuel tank
- Alternator 12V - 40A

PUMP UNIT SPECIFICATIONS

- C.E.T. single stage centrifugal pump
- Pump body made from high resistance aluminum alloy
- Bronze impeller
- Mechanical shaft seal
- Stainless steel pump shaft
- Electric priming system, guaranteed up to 20' (6 meter) lift
- One 1 1/2" (38mm) delivery outlet with Fire Type swing-out valve
- One 2 1/2" (65mm) suction inlet
- Dimensions: Length: 31-3/16" (792 mm); Width: 26-1/16" (662 mm); Height: 33-5/8" (864 mm).
- Wet weight: 360 lbs (163 kg)


CONTROL PANEL

- Engine start/stop switch
- Throttle control lever
- Operating panel light
- Pilot lights
- Pressure gauge
- Vacuum pressure gauge

PERFORMANCE

255 gpm @ 10 psi
245 gpm @ 50 psi
185 gpm @ 100 psi

135 gpm @ 150 psi
110 gpm @ 175 psi

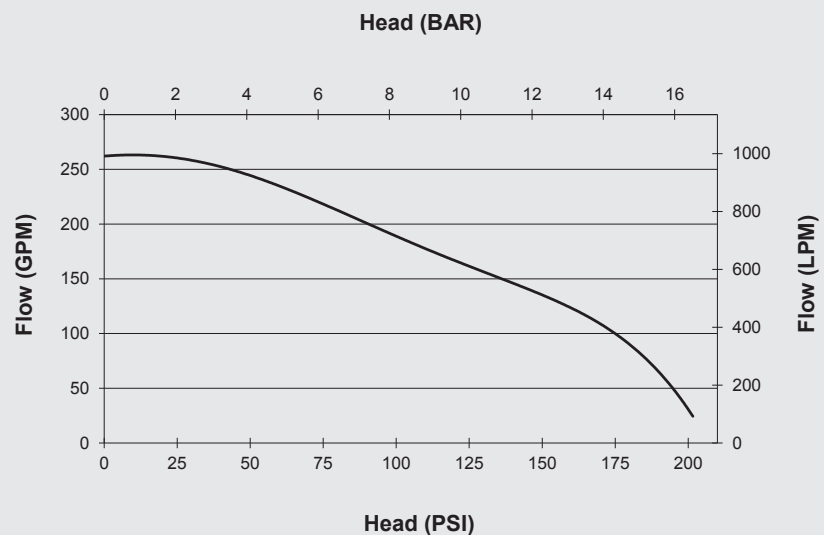

LIMITED WARRANTY

- 3 YEARS



ACCEPT ONLY THE BEST



**A CENTURY
OF ENGINEERING
FOR THE BRAVEST**

75 Hector St., P.O. Box 90,
Pierreville (Québec)
Canada J0G 1J0
Phone : 1-800-567-2719
Fax : 1-800-434-2613
www.fire-pumps.com